

INOX®



MODELS:

**CX30** 560 TVL (TR)

**CX25** 520 TVL (EN)

HIGH RESOLUTION

**560 TVL** CX30

## COMPACT COLOR DOME CAMERA

- Sony CCD & DSP inside
- Semi vandal proof housing
- Day & night application
- Vivid color video quality
- Wide angle lens



## 560TVL HIGH RESOLUTION VIDEO

The CX30 delivers a max. horizontal resolution of 560 TV Lines. With the advanced technology inside, the camera generates more TV lines than other conventional CCTV cameras, giving sharper & more detailed images

HIGH RESOLUTION

# 560 TVL


CX30

wide angle 3.3mm camera lens



## LOW POWER HEATLESS DESIGN

Made for 24/7 operation. All CX Series of camera models are designed to operate at a very low power consumption. With its low power camera circuit design, the camera are able to operate 24/7 without any heat issues that shortens the camera lifespan

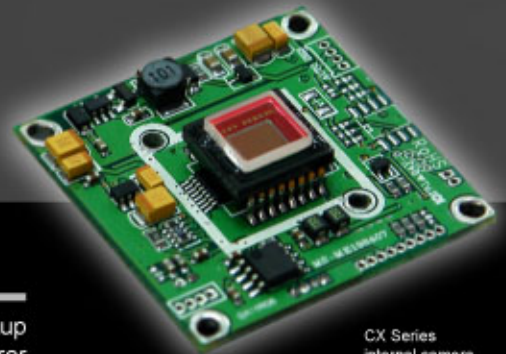

CX Series internal camera pcb board (CX25)

## SONY CCD INSIDE

By incorporating the "latest model of SONY CCD technology" as its image pickup sensor, the CX series of cameras are guaranteed to provide a better and clearer video images for all monitoring and security purpose



OPTIONAL INTEGRATED AUDIO MIC INSIDE

## CRYSTAL CLEAR AMPLIFIED AUDIO

Video with audio sound is the best evidence in the court of law. CX Series of dome cameras are capable of integrating CXA-2 audio sound device attached into the camera. The optional CXA-2 are capable to pick-up crystal clear audio sound up to 65ft away.

## COMPACT & MODERN DESIGN

With its unique compact shape & modern color, the camera are guaranteed to match with all interior & exterior designs



## Product Specifications

Models:	CX30	CX25
Image Pick-up Sensor	1/3" SONY Super HAD CCD	
Video Resolution	560 TV Lines	520 TV Lines (enhanced)
Minimum Illumination	0.25 Lux	
Sync System	Internal	
Video White Balance	ATW (Auto Tracking White)	
Video Gain Control	Auto (ON)	
S/N Ratio	More than 48db	
Electronic Shutter	PAL: 1/50 ~ 1/1000000 NTSC: 1/60 ~ 1/1000000	
Gamma Correction	0.45	
Iris	A.E.S (Auto Electronic Shutter)	
Lens	Standard default: 3.3mm / Optional changeable to: 6mm, 8mm, 12mm, 16mm	
Video Output	Composite 1.0Vp-p at 75 ohm	
Operation Temperature	5° C to 60° C	
Operational Humidity	Within 85% RH	
Power Supply Input	DC 12 volts	
Operating Current	120mA ± 10%	70mA ± 10%
Camera Dimension	100mm (W) x 67mm (H)	
Camera Weight	Approx. 200 gram (without box)	

### Camera lens comparison example



**6mm lens**



**8mm lens**



**12mm lens**



**16mm lens**

## WIDE RANGE OF CAMERA LENS TO SUITE YOUR APPLICATION (optional)

Optional camera lens are available to suite all monitoring purposes. High resolution lens are available for 6mm, 8mm, 12mm & 16mm. Be sure to use only original camera lens from INOX for a crystal clear video quality



Others conventional



INOX CX Series

### VIVID TRUE COLOR VIDEO

Producing to the nearest true color of an object for better recognition

**INOX®**

Distributed by:

**INOX SECURITY PTY. LTD.**

- Canada (Incorporation No. BC 0722077)

**INOX MANUFACTURING (M) SDN. BHD.**

- Malaysia (Company No. 671850-H)

Specifications, description and design are subject to change without prior notice. The brands and products names are properties of their respective owners

[www.inox.com.my](http://www.inox.com.my)

